


Roof hatches



SKYLIGHT LOFT **TERMO**

Skylight Loft Termo roof hatches are characterised by a unique yet simple and straight geometry of the insulated profile, but with an added thermal insulation. They provide easy and safe access to the roof.

SKYLIGHT LOFT TERMO

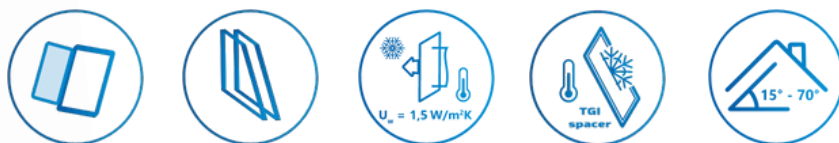

Energy efficiency	<ul style="list-style-type: none"> • package of 2 panes with a warm TGI Spacer frame • original rounded thermally insulated profile • $U_w = 1,5 \text{ W/m}^2\text{K}$
Material	<ul style="list-style-type: none"> • lead-free PVC • steel reinforcement
Opening	<ul style="list-style-type: none"> • manual-lateral • possibility of opening to the right or left side of the roof
Handle	<ul style="list-style-type: none"> • 1 position of passive ventilation

Window U-value	Glazing U-value	Acoustic insulation	Air permeability	Water tightness class	Wind load resistance
1,5 W/m ² K	1,0 W/m ² K	30 dB	class No. 4	class No. E1200	class No. C3

- **Roof hatches have high thermal insulation** parameters dedicated to rooms which are not heated but it does not exclude their use in heated rooms. $U_w = 1,5 \text{ W/m}^2\text{K}$.
- **Long lifespan.** Aesthetic PVC, resistant to ageing, not sensitive to moisture and temperature changes, ideal for every room at your home.
- **Functionality.** Owing to the possibility of opening to the right or to the left of the roof, they ensure easy exit to the roof.
- **The roof hatch has an opening/closing lock** which ensures an opened position up to 90° that allows for safe access to the roof.
- **The mounted handle** allows for opening the roof hatch to the airing position.
- **Possible installation** on roofs with an **angle of inclination of 15 to 70 degrees.**
- **A system of four seals** resistant to low temperatures ensures the perfect tightness of Skylight roof hatch.
- **Design.** This roof hatch with the original simple, insulated profile will satisfy all the designing requirements.
- **No special maintenance treatment required.** It needs only washing.

Standard roof hatches dimensions:

4/7	5/7	5/9	6/9	7/9
450x730	550x780	550x980	660x980	780x980

