
Roof windows

SKYLIGHT

A standard choice of a PCV window for the ideal balance between price and quality. **Skylight** roof windows are distinguished above all by their attractive, slim appearance with straight lines.



SKYLIGHT

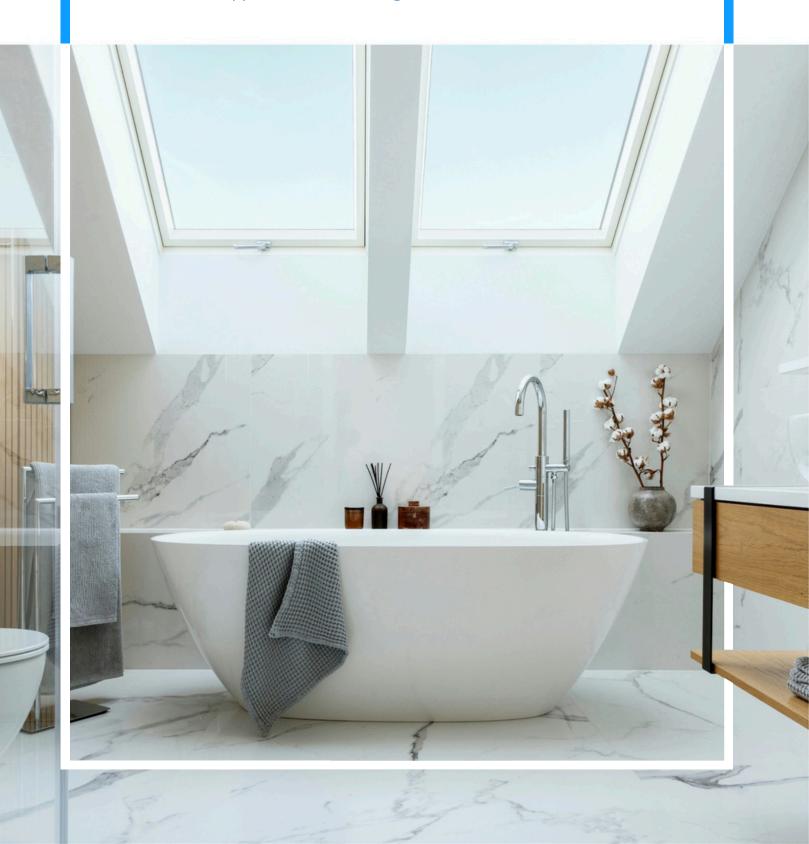











Energy efficiency	 2-pane package straight classic PVC profile Uw=1,4 W/m²K 					
Material	lead-free PVCsteel reinforcement					
Axis of rotation	e elevated (3/4 window)					
Opening	• manual					
Handle	mounted on the bottom1 position of passive ventilation					

Technical data:

Window	Glazing	Acoustic	Air	Water	Wind load	
U-value	U-value	insulation	permeability	tightness class	resistance	
1,4 W/m ² K	1,1 W/m ² K	30 dB	class No. 3	class No. E1050	class No. C3	

- The straight classic profile, in combination with the 2-pane package, guarantees the sustainable balance of thermal energy acquisition and loss. Uw = 1,4 W/m²K.
- **Longer lifespan**. Aesthetic PVC, resistant to ageing, not sensitive to moisture and temperature changes, ideal for every room at your home.
- 3/4 elevated axis of rotation improves visibility from the window and easy access.
- **Design**. This window with the original rounded profile will satisfy all the designing requirements.
- Original patented system of fittings guarantees full sash stability both in the half-open function, open function and rotational function with the maximum safety.
- A package of four seals resistant to low temperatures ensures the perfect tightness of Skylight roof window.
- Possible installation on roofs with an angle of inclination of 15 to 70 degrees.

- The external roof window flashing protects fittings against atmospheric conditions and improves the sealing of the casing-sash connection.
- **Shock absorption fitting** does not need any adjustment.
- No special maintenance treatment required. It needs only regular washing.
- A comfortable position for washing the external side of the window - sash rotation by 120°.



Standard window dimensions:

5/7	5/9	5/11	6/9	6/11	6/14	7/9	7/11	7/14	7/16	9/11	9/14	11/11	11/14
550x780	550x980	550x1180	660x980	660x1180	660x1400	780x980	780x1180	780x1400	780x1600	940x1180	940x1400	1140x1180	1140x1400