

2023

Roof windows

SKYLIGHT Plus **Termo**

Skylight Plus Termo roof windows are a combination of the new simple profile and the proven 2-pane package. The U_w thermal coefficient is at $1,3 \text{ W/m}^2\text{K}$.



SKYFENS SKYLIGHT PLUS TERMO




Energy efficiency	<ul style="list-style-type: none"> 2-glazed package simple classic profile parameter $U_w=1,3 \text{ W/m}^2\text{K}$
Material	<ul style="list-style-type: none"> lead-free PVC steel reinforcements
Axis of rotation	<ul style="list-style-type: none"> raised (3/4 window)
Opening	<ul style="list-style-type: none"> manual assisted by gas actuators
Handle	<ul style="list-style-type: none"> fitted at the bottom one position for passive ventilation

Technical data:

Window U-value	Glazing U-value	Acoustic insulation	Air permeability	Water tightness class	Wind load resistance
1,3 W/m ² K	1,1 W/m ² K	31 dB	class 3	class E1200	class C4

- **The new and improved profile** combined with the 2-glazed package guarantees a balanced balance of heat gain and loss. U_w coefficient of 1,3 W/m²K.
- **A package of four special seals** prevents leaks and contributes to a higher level of thermal protection for the window.
- **The raised 3/4 pivot** increases visibility from the window and allows free access to the window space.
- **Easy installation of flanges** thanks to extended grooves in the frame. Angles used increase the adjustment range of the installed window.
- **Safety of use.** The window is equipped with an innovative frame hinge, which increases the safety, durability and functionality of the window for years to come.
- **The package of four low-temperature seals** ensures excellent air-tightness of the Skylight Plus Termo roof window.
- **The external cladding of the roof window protects the fittings** from the weather and improves the sealing of the frame-sash connection.
- Mounting the window is compatible with all types of roofs with a pitch of 15-70°.
- **No special maintenance required.** Care is limited to cleaning the windows.
- **Convenient position for cleaning** the exterior side of the window - turning the sash 120° .

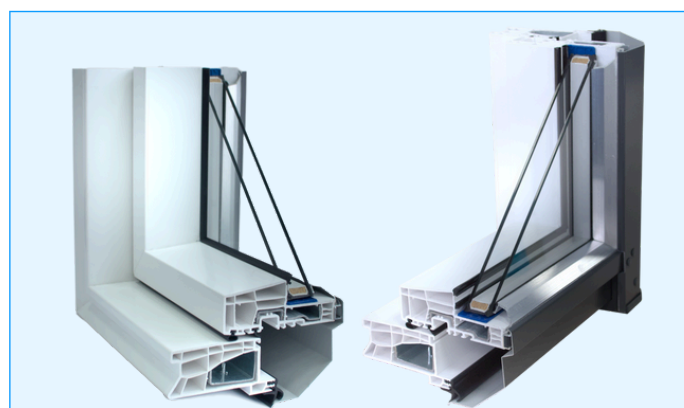

Standard window dimensions:

5/7	5/9	5/11	6/9	6/11	6/14	7/9	7/11	7/14	7/16	9/11	9/14	11/11	11/14
550x780	550x980	550x1180	660x980	660x1180	660x1400	780x980	780x1180	780x1400	780x1600	940x1180	940x1400	1140x1180	1140x1400

We offer the option of bespoke roof windows in any size between our smallest and largest standard model, ensuring a perfect fit for individual projects.